

TECHNICAL SPECIFICATIONS

HIAB J1200RS




HIAB

BUILT TO PERFORM

J
SERIES

HIAB J1200RS BASIC DATA

TECHNICAL DATA	J1200RS 66	J1200RS 71	J1200RS 84	J1200RS 89
Max. lifting capacity (lb-ft)	81 200	80 450	77 500	76 750
Outreach, hydraulic extensions (ft)	21' 8"	23' 3"	27' 5"	29' 0"
Outreach / lifting capacity (ft - lb)	10' - 7 300	10' - 7 300	10' - 6 850	10' - 6 850
	13' - 5 950	13' - 5 840	13' - 5 620	13' - 5 510
	16' - 4 940	16' - 4 890	16' - 4 720	16' - 4 670
	20' - 4 100	20' - 4 060	20' - 3 880	20' - 3 880
	21' - 3 750	23' - 3 260	23' - 3 310	23' - 3 310
	-	-	26' - 2 870	26' - 2 870
	-	-	-	28' - 2 510
Slewing system	Single			
Slewing angle (°)	415			
Slewing torque, gross (lb-ft)	16 160			
Max. working pressure (psi)	3 770			
Recommended oil flow - fixed pump (gal/min)	32			
Min recommended oil flow - variable displacement pump (gal/min)	42			
Weight (lb)	4 320	4 370	4 740	4 780

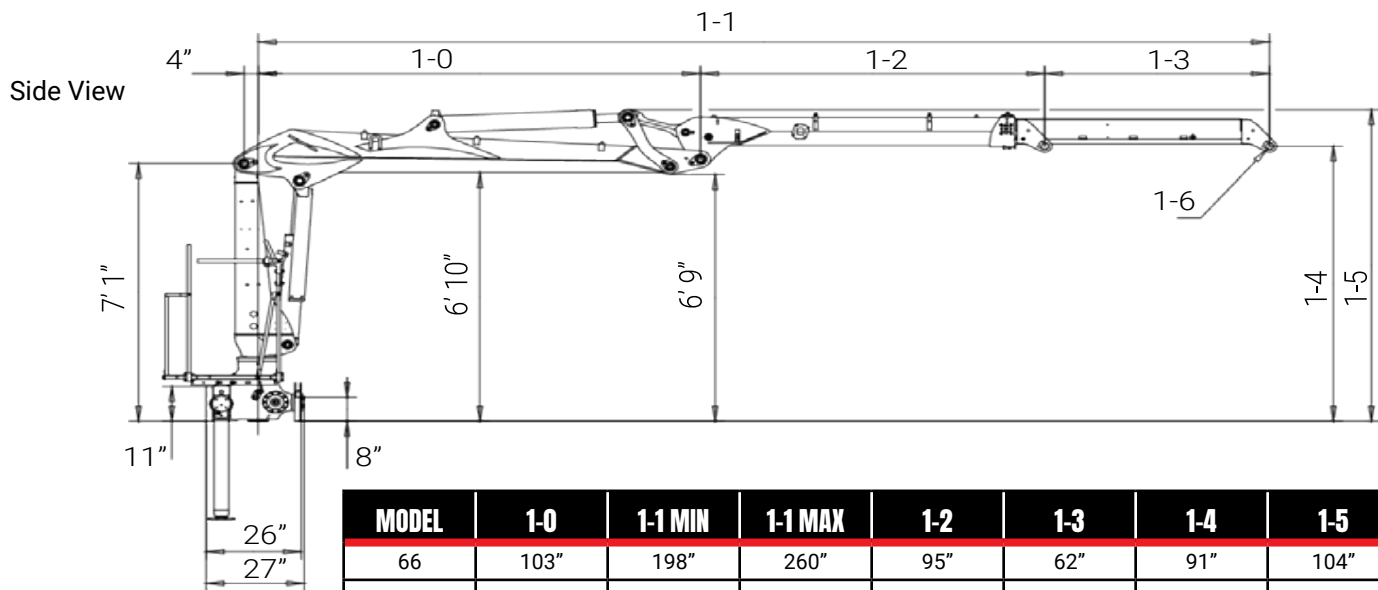

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts, and MULTILIFT demountables, as well as DEL, WALTCO, and ZEPRO tail lifts.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com
hiab.us.com

Hiab USA Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. 419 482 6000
fax. 419 482 6001



HIAB

V2022.08.12

