

TECHNICAL SPECIFICATIONS

X-HIPRO 548




BUILT TO PERFORM



HIAB X-HIPRO 548

TECHNICAL SPECIFICATIONS

Technical Data	X-HIPRO 548 E-4	X-HIPRO 548 E-5	X-HIPRO 548 E-6	X-HIPRO 548 E-7	X-HIPRO 548 E-8	X-HIPRO 548 E-9
Lifting capacity						
Lifting capacity (ft-lbs)	351 817	429 261	430 736	432 949	432 949	433 687
Outreach						
Standard outreach (ft-lbs)	13' 9" - 25 574	14' 9" - 23 369	14' 5" - 23 590	15' 1" - 22 267	15' 1" - 21 826	15' 5" - 21 164
	19' - 18 298	20' - 16 755	19' 4" - 17 196	20' - 16 094	20' - 15 873	20' 4" - 15 212
	24' 7" - 13 889	25' 7" - 12 787	25' - 12 787	25' 7" - 11 905	25' 7" - 11 685	25' 11" - 11 244
	30' 6" - 11 023	31' 6" - 10 141	30' 11" - 10 031	31' 6" - 9 370	31' 6" - 9 039	31' 10" - 8 598
	36' 9" - 9 259	37' 5" - 8 378	36' 9" - 8 267	37' 5" - 7 606	37' 5" - 7 275	37' 9" - 6 834
	-	44' - 7 055	43' 4" - 6 834	44' - 6 261	44' - 5 908	44' 4" - 5 512
	-	-	50' 2" - 5 908	50' 10" - 5 291	50' 11" - 4 938	51' 2" - 4 542
	-	-	-	57' 5" - 4 630	57' 5" - 4 277	57' 9" - 3 880
	-	-	-	-	64' 4" - 3 792	64' 8" - 3 395
	-	-	-	-	-	71' 2" - 3 042
Outreach, hydraulic extensions (ft)	36' 9"	44' 4"	50' 6"	57' 9"	64' 4"	71' 6"
Oil and tank						
Rec OilFlow lo (gal/min)	26	26	26	26	26	26
Rec OilFlow hi (gal/min)	32	32	32	32	32	32
Work pressure (psi)	5 366	5 366	5 366	5 366	5 366	5 366
Slewing						
Slewing torque (ft-lbs)	36 878	36 878	36 878	36 878	36 878	36 878
Slewing angle (degrees)	999	999	999	999	999	999
Dimensions						
Height in folded position (in)	8' 2"	8' 2"	8' 2"	8' 2"	8' 2"	8' 2"
Width in folded position (in)	8' 4"	8' 4"	8' 4"	8' 4"	8' 4"	8' 4"
Weights						
Weight of crane w/o stabilizers (lbs)	9 711	10 377	10 783	11 274	11 700	12 099
Additional weight of hose & pipe kit (lbs)	181	196	289	194	320	415
Weight of stabilizers (lbs)	2 361	2 361	2 361	2 361	2 361	2 361
Installation space						
Installation space needed (in)	5'	5' 5"	5' 5" - 5' 9"	5' 5" - 5' 9"	5' 5" - 5' 9"	5' 7" - 6' 1"

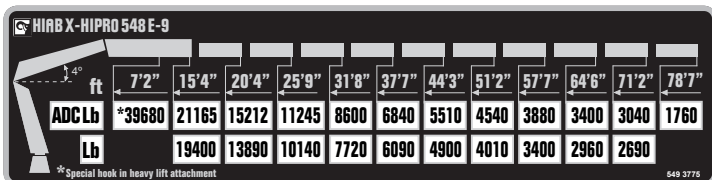

ft	7'2"	15'4"	20'4"	25'9"	31'8"	37'7"	44'3"	51'2"	57'7"	64'6"	71'2"	78'7"
ADC Lb	*39680	21165	15212	11245	8600	6840	5510	4540	3880	3400	3040	1760
Lb		19400	13890	10140	7720	6090	4900	4010	3400	2960	2690	

*Special hook in heavy lift attachment

Disclaimer. This table shows a few examples of models, and represents some of all options available. With the opportunity to configure your crane, we can provide you with a crane perfectly tailored to your needs. Please contact your local Hiab sales representative for more information on the variety of options we can offer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colors.

BUILT TO PERFORM

Hiab (Nasdaq Helsinki: HIAB) is a leading provider of smart and sustainable on road load-handling solutions, committed to delivering the best customer experience every day with the most engaged people and partners. Hiab's premium equipment includes HIAB and EFFER loader cranes, MOFFETT and PRINCETON truck mounted forklifts, MULTILIFT skiploaders and hooklifts, GALFAB roll-off cable hoists, and WALTCO tail lifts, and the service brand HIPERFORM, a comprehensive suite of smart solutions that help maximize the life-cycle value of Hiab's equipment. As the industry pioneer, Hiab continues to make on road load-handling smarter, safer and more sustainable to build a better tomorrow.

www.hiabgroup.com

